


BRYANT®

PRODUCT GUIDE

Healthcare Solutions

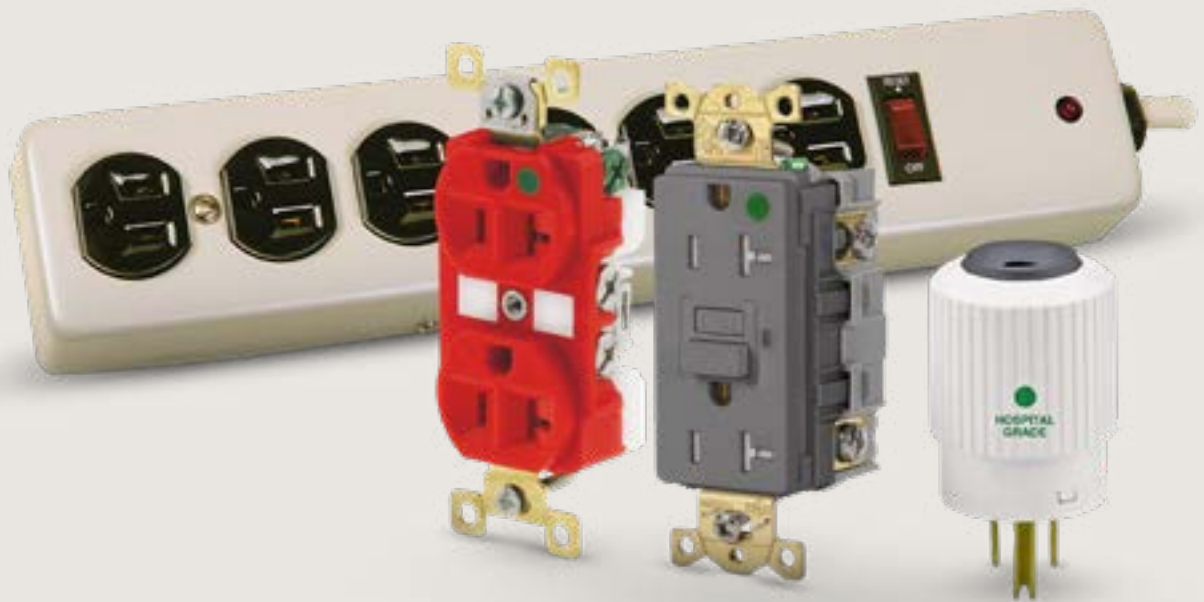

When it comes to healthcare, no one wants to settle for second best.

When you choose Bryant® wiring devices, you never have to.

We take pride in offering the very best quality wiring devices including a line designed specifically for hospital and healthcare applications.

This brochure is designed to not only help you understand what “Hospital Grade” really means, it is intended to help you become familiar with some of the most common Bryant products that are typically used in hospital and healthcare applications and to help facilitate your search for these items. For a complete list of products, be sure to consult the Bryant catalog or visit us online at <https://www.hubbell.com/bryant/en>.

What is “Hospital Grade” and what does it mean?

Hospital grade devices are a step above traditional industrial grade devices and represent the most durable construction in our product offering. The term “Hospital Grade” was actually developed to describe a device that would withstand the heavy abuse typically seen in hospital and heavy-duty industrial applications. Abrupt plug pullout, damage from heavy equipment and disrupted ground continuity are just a few examples of problems encountered in heavy-duty healthcare applications. To effectively service these harsh environments, “Hospital Grade” devices were conceived. Working closely with UL®, specialized new tests were developed to qualify devices to these stringent requirements and label them accordingly. Today, this label is universally recognized as a green dot on the face of the device. Underwriters Laboratories is very specific regarding the scope, construction and specific tests required for hospital grade devices*. The National Electrical Code requirements relating to hospital grade devices can be found in NEC® article 517.

As with all devices, simply having the hospital grade designation doesn’t mean all hospital grade devices are created equally. Bryant’s hospital grade devices were designed specifically for harsh environments and typically exceed the minimum UL testing requirements for a Hospital Grade listing. When using a Bryant device, you can be assured it has passed the most rigorous requirements for strength, durability, ease of assembly and grounding reliability. Bryant’s unique design, high quality construction, and unparalleled performance provide extreme confidence and reliability when it comes to healthcare.

*UL 498 Supplement SD – Hospital Grade Devices, Section SD1.



Table of Contents

Hospital Grade Receptacles 4

Ground Fault Circuit Interrupters..... 6

USB Ground Fault Circuit Interrupters 7

Surge Receptacles..... 8

Portable Surge Protection Devices 9

Locking Plugs and Connectors..... 10

Hospital Grade Straight Blade Plugs and Connectors.....11

Specialty “Hospital Only” Devices and Wall Dimmers..... 12

Extra Heavy Duty Industrial Specification Grade Switches 13

Specialty Wallplates 14




Check out our interactive online catalog

A go-to resource for all our product solutions, and introduces time saving features.

[Learn more](#)

Hospital Grade Receptacles

Extra Heavy Duty 15A and 20A 125V and 20A 250V Receptacles

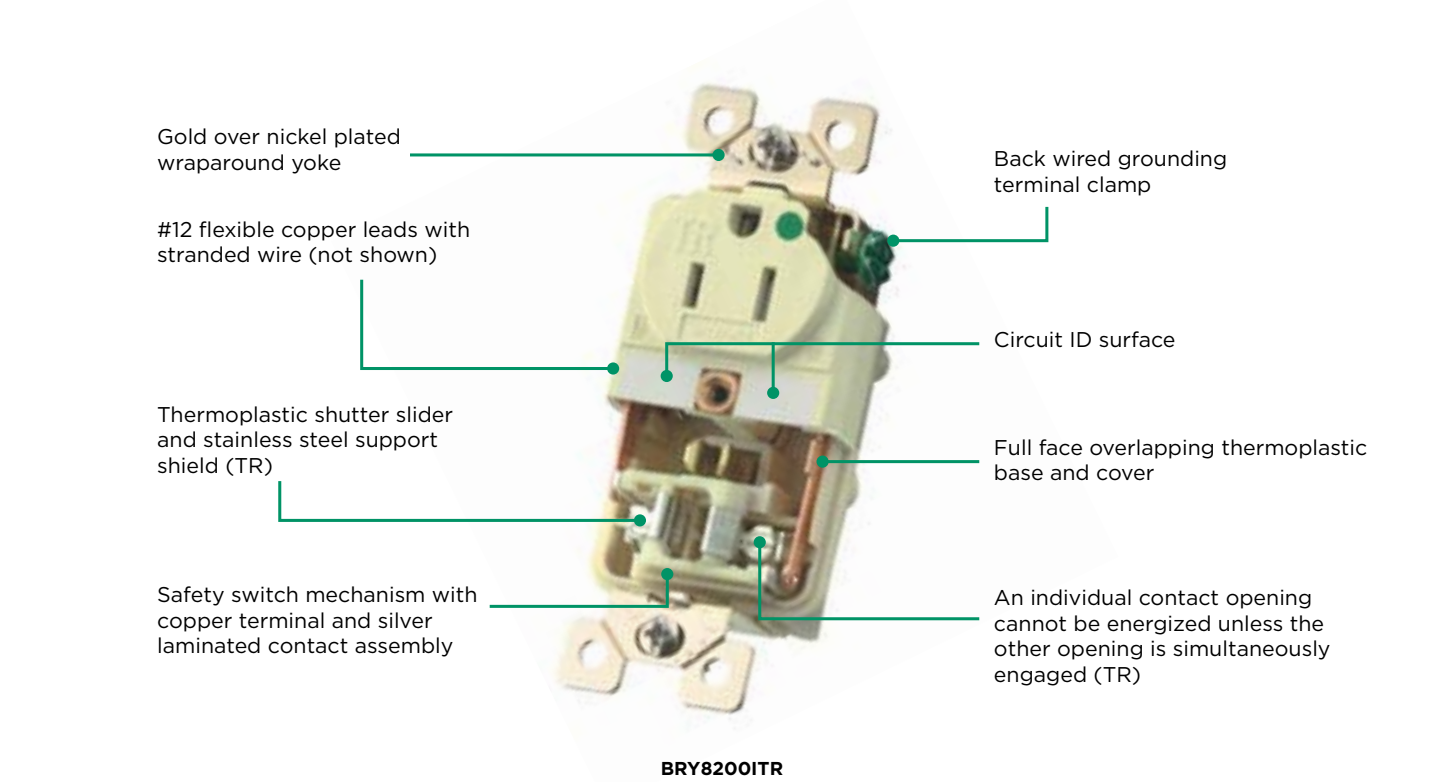

TECH-SPEC®




Wiring		Back and Side Wired			Stranded Wire Leads		Back and Side Wired	
Face		Duplex			Duplex		Single	
Rating	Color	Standard	Weather Resistant	Lighted Face	Tamper-Resistant	Standard	Weather Resistant	
NEMA 5-15, 15A 125V 	Brown	BRY8200	—	—	BRY8200TR	—	—	
	Gray	BRY8200GRY	—	—	BRY8200GTR	—	—	
	Ivory	BRY8200I	BRY8200IWR	BRY8200GRYL	BRY8200ITR	—	—	
	Red	BRY8200RED	—	BRY8200IL	BRY8200RTR	—	—	
	White	BRY8200W	—	BRY8200REDL	BRY8200WTR	—	—	
	Orange*	BRY8200IG	—	BRY8200WL	—	—	—	
NEMA 5-20, 20A 125V 	Brown	BRY8300	—	—	BRY8300TR	8310	—	
	Gray	BRY8300GRY	—	—	BRY8300GTR	8310GRY	8310GRYWR	
	Ivory	BRY8300I	BRY8300IWR	BRY8300GRYL	BRY8300ITR	8310I	8310IWR	
	Red	BRY8300RED	—	BRY8300IL	BRY8300RTR	8310RED	8310REDWR	
	White	BRY8300W	—	BRY8300REDL	BRY8300WTR	8310W	8310WWWR	
	Orange*	BRY8300IG	—	BRY8300WL	—	8310IG	—	
NEMA 6-20, 20A 250V 	Brown	—	—	—	—	8410BRN	—	
	Gray	—	—	—	—	8410GRY	—	
	Ivory	—	—	—	—	8410I	—	
	Red	—	—	—	—	—	—	
	White	—	—	—	—	8410W	—	
	Orange*	—	—	—	—	8410IG	—	

Note: *Orange is Isolated Ground.

Hospital Grade Receptacles

Heavy Duty 15A and 20A 125V Receptacles

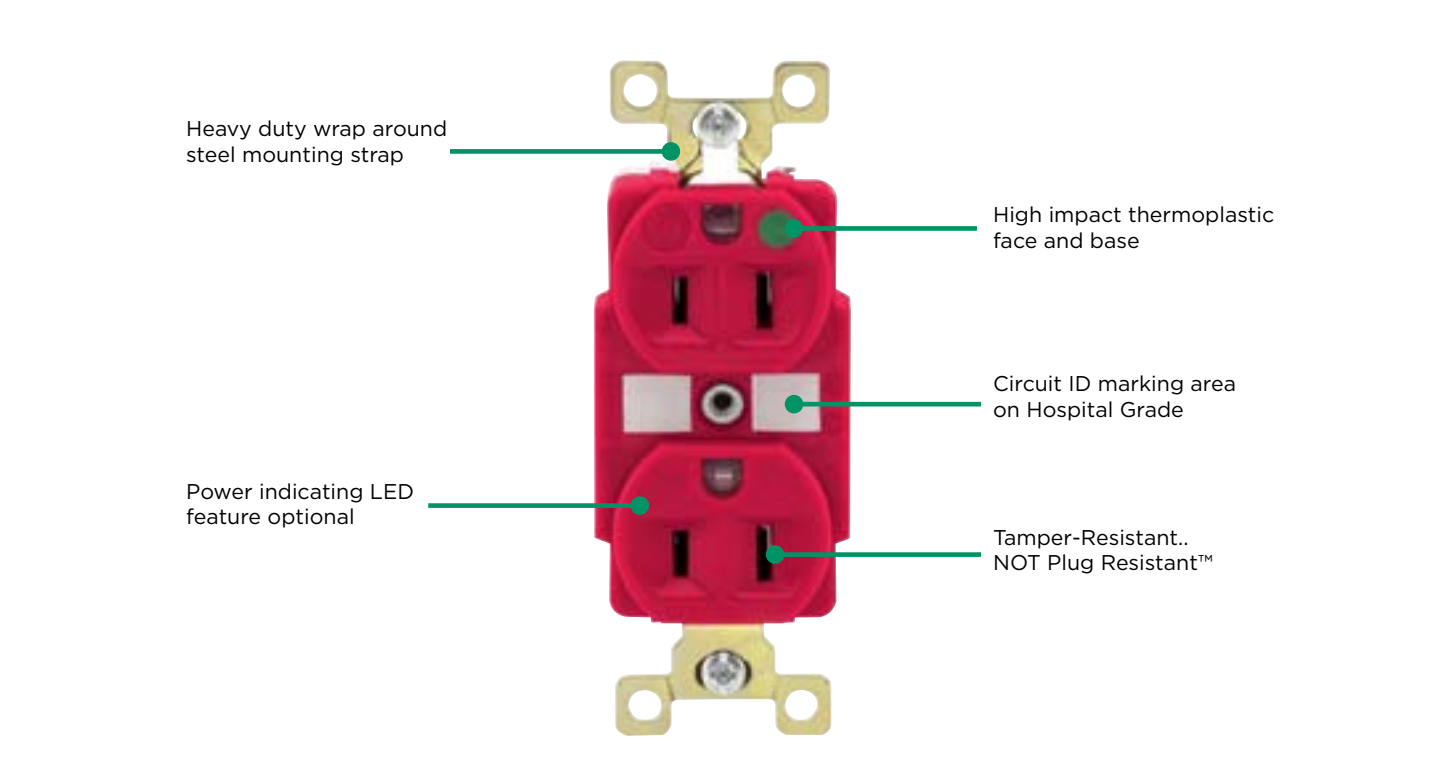

Wiring		Back and Side Wired						
Face		Duplex			Decorator			
Rating	Color	Standard	Tamper-Resistant	Power Ind.LED	TR & LED	Duplex	Isolated Ground	Lighted Face
NEMA 5-15, 15A 125V 	Brown	—	—	—	—	9200	—	—
	Gray	8200HBGRY	8200HBGRYTR	8200HBGRYL	—	9200GRY	9200IGGRY	—
	Ivory	8200HBI	8200HBITR	8200HBIL	8200HBILTR	9200I	—	9200IL
	Red	8200HBRED	8200HBREDTR	8200HBREDL	—	9200RED	—	—
	White	8200HBW	8200HBWTR	8200HBWL	8200HBWLTR	9200W	—	—
	Orange*	—	—	—	—	—	9200IG	—
NEMA 5-20, 20A 125V 	Brown	8300HB	8300HBTR	8300HBL	—	9300	—	—
	Gray	—	—	8300HBGRYL	—	9300GRY	9300IGGRY	—
	Ivory	8300HBI	8300HBITR	8300HBIL	8300HBILTR	9300I	9300IGI	—
	Red	8300HBRED	8300HBREDTR	8300HBREDL	—	9300RED	9300IGRED	—
	White	8300HBW	8300HBWTR	8300HBWL	8300HBWLTR	9300W	9300IGW	9300WL
	Orange*	—	—	—	—	—	9300IG	—

Note: *Orange is Isolated Ground.

Ground Fault Circuit Interrupters

Hospital Grade Ground Fault Receptacles

VERIFIED TO FEDERAL SPECIFICATION W-C-596

Heavy Duty Hospital Grade Offering

Description	Color	15A	20A
Standard Hospital Grade Receptacle	Brown	GFR82	GFR83
	Black	GFR82BLK	GFR83BLK
	Gray	—	GFR83GRY
	Ivory	GFR82I	GFR83I
	Light Almond	—	GFR83LA
	Red	GFR82R	GFR83R
	White	GFR82W	GFR83W
Tamper-Resistant / Weather Resistant	Brown	—	GFRTW83
	Black	GFRTW82BLK	GFRTW83BLK
	Gray	—	GFRTW83GRY
	Ivory	GFRTW82I	GFRTW83I
	Light Almond	GFRTW82LA	GFRTW83LA
	Red	—	GFRTW83R
	White	GFRTW82W	GFRTW83W



USB Ground Fault Circuit Interrupters

Hospital Grade Ground Fault USB Receptacles

GFCI USB Receptacle - Hospital Grade A/C

VERIFIED TO FEDERAL SPECIFICATION W-C-596

Description	Catalog Number		Color
	15A	20A	
Hospital Grade A/C - Tamper-Resistant	GFUSB82AC GFUSB82ACW GFUSB82ACBK GFUSB82ACI GFUSB82ACLA GFUSB82ACGY GFUSB82ACR	GFUSB83AC GFUSB83ACW GFUSB83ACBK GFUSB83ACI GFUSB83ACLA GFUSB83ACGY GFUSB83ACR	Brown White Black Ivory Light Almond Gray Red
	GFUSBWR82AC GFUSBWR82ACW GFUSBWR82ACBK GFUSBWR82ACI GFUSBWR82ACLA GFUSBWR82ACGY GFUSBWR82ACR	GFUSBWR83AC GFUSBWR83ACW GFUSBWR83ACBK GFUSBWR83ACI GFUSBWR83ACLA GFUSBWR83ACGY GFUSBWR83ACR	Brown White Black Ivory Light Almond Gray Red

GFCI USB Receptacle - Hospital Grade Dual C

VERIFIED TO FEDERAL SPECIFICATION W-C-596

Description	Catalog Number		Color
	15A	20A	
Hospital Grade Dual C - Tamper-Resistant	GFUSB82C GFUSB82CW GFUSB82CBK GFUSB82CI GFUSB82CLA GFUSB82CGY GFUSB82CR	GFUSB83C GFUSB83CW GFUSB83CBK GFUSB83CI GFUSB83CLA GFUSB83CGY GFUSB83CR	Brown White Black Ivory Light Almond Gray Red
	GFUSBWR82C GFUSBWR82CW GFUSBWR82CBK GFUSBWR82CI GFUSBWR82CLA GFUSBWR82CGY GFUSBWR82CR	GFUSBWR83C GFUSBWR83CW GFUSBWR83CBK GFUSBWR83CI GFUSBWR83CLA GFUSBWR83CGY GFUSBWR83CR	Brown White Black Ivory Light Almond Gray Red



Surge Receptacles

- 400V clamping capability
- 240 joules & 15,000A of surge protection
- All-glass printed circuit board with a conformal coating and nylon shield
- Visible LED
- Audible alarm (muting screw included)
- High-impact nylon face
- External back-wire terminations with “U” shaped wire clamps
- Automatic grounding clip and tandem bypass contacts



SP831GA SP531A



Hospital Grade 15A and 20A 125V Surge Receptacles

Description	Color	Standard	With Isolated Ground
NEMA 5-15, 15A, 125V 	Blue	—	SP821GA
	Gray	SP82GYA	—
	Ivory	SP821A	SP821GIA
	Orange	—	SP821GOA
	Red	—	SP821GRA
	White	SP82WA	SP821GWA

Description	Color	Standard	With Isolated Ground
NEMA 5-20, 20A, 125V 	Blue	—	SP831GA
	Gray	SP83GYA	SP831GGYA
	Ivory	SP831A	SP831GIA
	Orange	—	SP831GOA
	Red	—	SP831GRA
	White	SP83WA	SP831GWA

Specification Grade 15A and 20A 125V Surge Receptacles



Description	Color	Standard	With Isolated Ground
NEMA 5-15, 15A, 125V 	Blue	SP52A	—
	Gray	SP52GYA	SP521GGYA
	Ivory	SP521A	—
	Orange	—	—
	Red	—	—
	White	SP52WA	SP521GWA

Description	Color	Standard	With Isolated Ground
NEMA 5-20, 20A, 125V 	Blue	SP53A	—
	Gray	SP53GYA	SP531GGYA
	Ivory	SP531A	—
	Orange	—	SP531GOA
	Red	—	—
	White	—	SP531GWA

Portable Surge Protection Devices

- Metallic and non-metallic units
- Six, seven and eight outlet units
- No surge, 350 joule, 1050 joule and 2100 joule protection units
- Transformer spaced outlets available on some units
- 15A resettable ON/OFF circuit breaker switch and power and ground indicating LEDs
- Available with fax/modem, cable TV and satellite protection on some units



BRY8PS2100D



BRY6MPS1050



BRY7PS1050M



BRY8PS2100D




BRY6PPS



	SPD		SPD with FAX/Modem	SPD with FAX/Modem/CATV/Satellite	Power Strip (No Surge Protection)
Number of Outlets	Six		Seven	Eight	Six
Joule Rating	350 (Non-Metallic) 1050 (Metallic)		1050	2100	N/A
Peak AMP Rating	6.5 kA (Non-Metallic) 19.5 kA (Metallic)		19.5 kA	39 kA	N/A
Down Line Warranty	\$2,500		\$10,000	\$25,000	N/A
Length	6 Foot	15 Foot	6 Foot	6 Foot	6 Foot
Non-Metallic Office White	—	BRY6PS35015	—	—	BRY6PPS
Metallic Office White	BRY6MPS1050	—	—	—	—

Locking Plugs and Connectors*


TECH-SPEC®

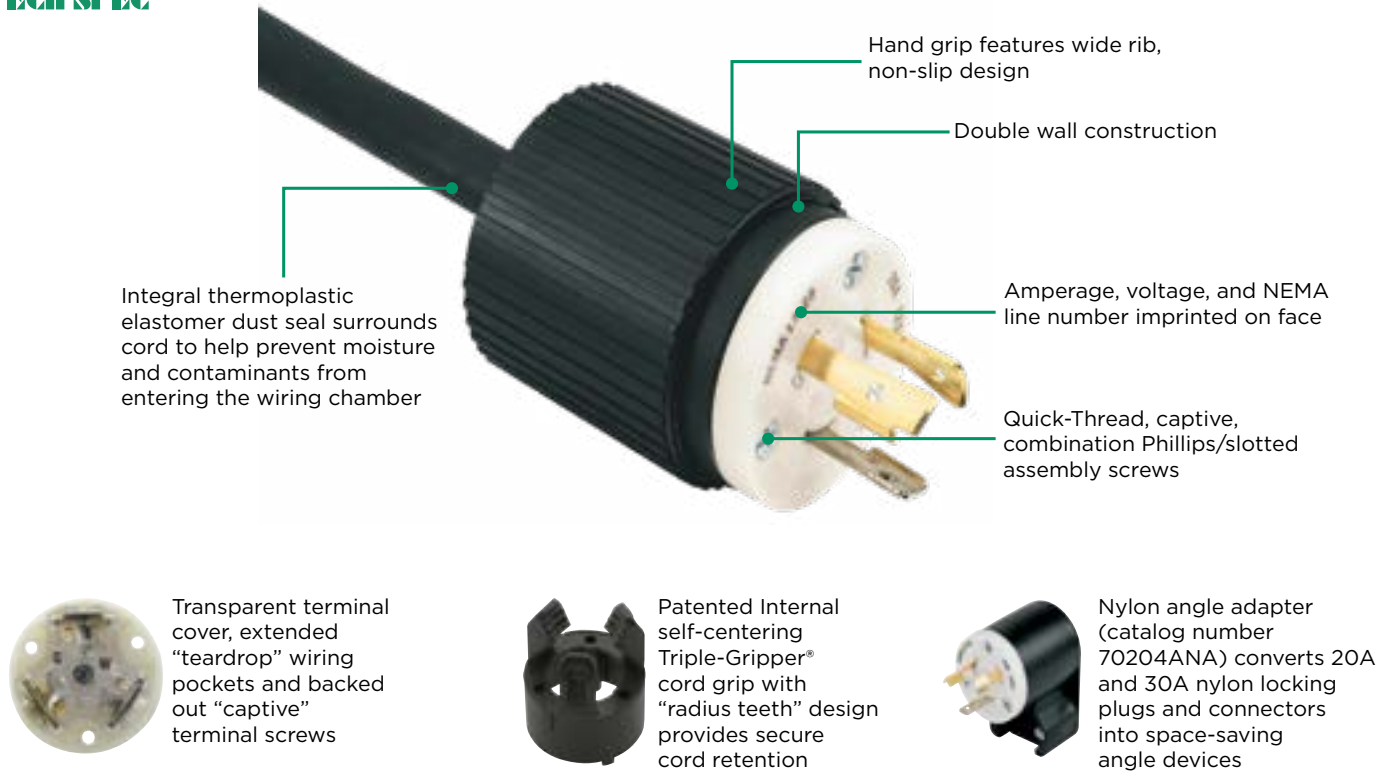

			Triple Gripper®		Flanged Devices Equipment Base With Nylon White Cup		Weather Protective Power Inlets	Single Nylon Receptacle, All Black	
Rating	Cord Diameter	Description	Nylon Plug	Nylon Connector	Male	Female	Die Cast Aluminum Plate		
NEMA L5-20, 20A 125V 	.300"-.655" (7.6-16.6)	Black/White All Black	70520NP 70520NPB	70520NC 70520NCB	70520MB —	70520ER —	70520MBWP —	—	70520FR
		Corrosion-Resistant Yellow/White	70520NPCR	70520NCCR	—	—	—	—	70520FRCR
		Isolated Ground Orange	—	—	—	—	—	—	70520IG
NEMA L6-20, 20A 250V 	.300"-.655" (7.6-16.6)	Black/White	70620NP	70620NC	70620MB	70620ER	70620MBWP		70620FR
		Corrosion-Resistant Yellow/White	70620NPCR	70620NCC	—	—	—	—	—
		Isolated Ground Orange	—	—	—	—	—	—	70620IG
NEMA L7-20, 20A 277V AC 	.300"-.655" (7.6-16.6)	Black/White	70720NP	70720NC	70720MB	70720ER	—		70720FR
NEMA L8-20, 20A 480V AC 	.300"-.950" (7.6-24.1)	Black/White	70820NP	70820NC	70820MB	70820ER	—		70820FR
NEMA L9-20, 20A 600V AC 	.300"-.655" (7.6-24.1)	Black/White	70920NP	70920NC	70920MB	70920ER	—		70920FR

Note: *There is not a UL Standard for "Hospital Grade" locking devices.

Hospital Grade Straight Blade Plugs and Connectors

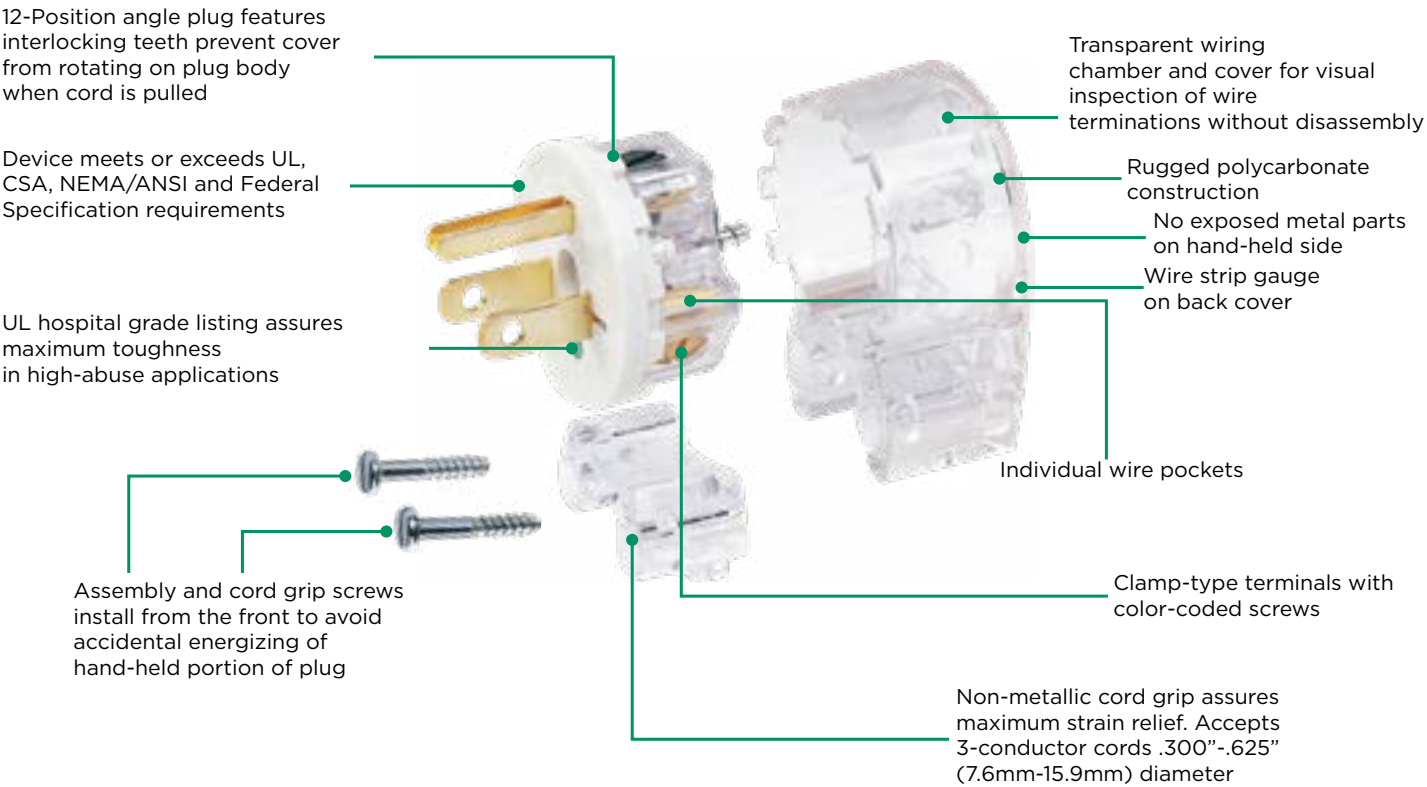

No matter which angle position you choose, the safety of straight-in wiring is assured. Exclusive Bryant safety design features no metal parts on hand-held portion of plug.

15A and 20A 125V and 20A 250V Plugs and Connectors

Device Type		Straight Plug		Angled Plug	Connector	
Rating	Cord Diameter	White Thermoplastic	Transparent/ Nylon/ Polycarbonate	Transparent/ Nylon/ Polycarbonate	White Thermoplastic	Transparent/ Nylon/ Polycarbonate
NEMA 5-15, 15A 125V 	.245"-.655" (6.2-16.6)	BRY8266NP	8266T	8295T	BRY8269NC	8269T
NEMA 5-20, 20A 250V 	.245"-.655" (6.2-16.6)	BRY8366NP	8366T	8395T	BRY8369NC	8369T
NEMA 6-20, 20A 250V 	.300"-.625" (7.6-15.9)	BRY8466NP	—	8495T	—	—



Specialty “Hospital Only” Devices

- Designed specifically for use in non-hazardous hospital applications
- Spring loaded shutters on connector and receptacle eject plug if not properly mated eliminating contact tease
- Suitable as disconnecting means under full-rated load
- Receptacle fits standard single receptacle plate and has clamp-type back wire terminals



Specialty “Hospital Only” Devices

Plug, nylon with clamp-type terminals	23014HG
Connector, nylon with clamp-type terminals	23001HG
Flush receptacle, black phenolic, back wired	23000HG



Wall Dimmers

- Compatible with most forward phase dimming lamps
- Suitable for single-pole or 3-way/4-way applications
- Tunable with trim adjustment on all models
- Available rocker and slide, or toggle and slide styles
- Matches all Bryant decorator, toggle and screwless wall plates
- UL/cUL Listed



LCD150TW



Ordering Information

Description	Color	Catalog Number	Poles
Toggle 150W LED/CFL, 600W Incandescent, 120V AC	White Ivory Light Almond	LCD150TW LCD150TI LCD150TLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way
Decorator Rocker 200W LED/CFL, 600W Incandescent, 120V AC	White Ivory Light Almond	LCD150DW LCD150DI LCD150DLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way
Decorator Slide 200W LED/CFL, 600W Incandescent, 120V AC	White Ivory Light Almond	LCD150SW LCD150SI LCD150SLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way
Decorator Rocker 300W LED/CFL, 600W Incand., Indicator light, 120V AC	White Ivory Light Almond	LCD300DW LCD300DI LCD300DLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way
Low Voltage Decorator Rocker 0-10V LED, 10A 120V AC, 5A 277V AC	White Ivory Light Almond	LCD0108DW LCD0108DI LCD0108DLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way
Low Voltage Decorator Slide 0-10V LED, 10A 120V AC, 5A 277V AC	White Ivory Light Almond	LCD0108SW LCD0108SI LCD0108SLA	SP, 3/4 Way SP, 3/4 Way SP, 3/4 Way



LCD0108SW




LCD0108DW



LCD300DW

Extra Heavy Duty Industrial Specification Grade Switches

Bryant’s Industrial AC Switch Design

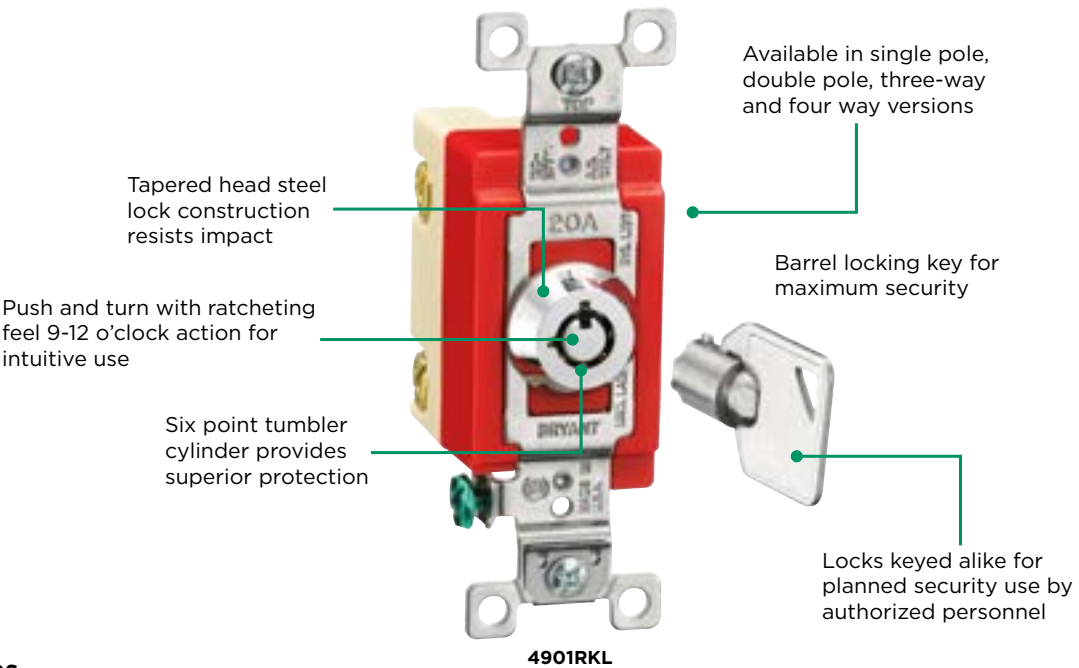

Bryant’s Toggle Switches

- High impact chemical resistant nylon toggle
- Backwire clamp-type terminal accepts up to #10 wire



Toggle Switches

Amp	Color	Single Pole	Double Pole	3-Way	4-Way
15A 120-277V AC	Black	4801BLK	—	—	4804BLK
	Brown	4801	4802	4803	4804
	Gray	4801GRY	4802GRY	—	4804GRY
	Ivory	4801I	4802I	4803I	4804I
	Red	—	—	—	—
20A 120-277V AC	White	4801W	4802W	4803W	4804W
	Black	4901BLK	4902BLK	4903BLK	—
	Brown	4901	4902	4903	4904
	Gray	4901GRY	4902GRY	4903GRY	4904GRY
	Ivory	4901I	4902I	4903I	4904I
30A 120-277V AC	Red	4901RED	4902RED	4903RED	4904RED
	White	4901W	4902W	4903W	4904W
	Black	—	—	—	—
	Brown	3001	3002BRN	3003BRN	—
	Gray	—	3002GRY	3003GRY	—
	Ivory	3001I	3002I	3003I	—
	Red	—	—	—	—
	White	—	—	—	—



4802



4904



4904L



6006



Locking Switches

Description	Amp	Single Pole	Double Pole	3-Way	4-Way	Replacement Key
Locking switch, straight key included	15A120-277V AC	4801L	4802L	4803L	4804L	6006
	20A120-277V AC	4901L	4902L	4903L	4904L	6006
Barrel locking switch, barrel key included	20A120-277V AC	4901RKL	4902RKL	4903RKL	4904RKL	6006RKL



4901RKL



6006RKL

Note: See page 14 for barrel key locking switch wallplates.

Specialty Wallplates

- Markings are beneath the surface to maintain clarity and legibility
- High-impact nylon for maximum strength and chemical resistance
- Withstands severe abuse in hospital, industrial and commercial applications
- Smooth easy-to-clean surface

Pre-marked Thermoplastic Plates



Emergency		
1-Gang Duplex Receptacle	Red	PJ8RMEV
Isolated Ground		
1-Gang Duplex Receptacle	Orange	P8OIG
1-Gang Single Receptacle	Orange	P7OIG
1-Gang Single Receptacle 1.6 in.	Orange	P720OIG
Computer Only		
1-Gang Duplex Receptacle	Ivory	PJ8C
1-Gang Fashion Series	Blue	PJ26CBL
1-Gang Fashion Series	Ivory	PJ26C



PJ8RMEV



P7OIG



PJ8C



SS12RKL
(with switch)



S7



23007

Specialty Plates



302 Stainless Steel Plates for Barrel-Lock Key Switch	
1-Gang with On/Off Marking	SS12RKRL
1-Gang with Position Marking	SS12RKMLM
2-Gang with On/Off Marking	SS22RKRL
2-Gang with Position Marking	SS22RKMLM
302 Stainless Steel and Cast Aluminum Plates	
302/304 Stainless Steel, Single-Gang, 1.40" Dia. Hole	S7
Brass, Single Gang, 1.40" Dia. Hole	SB7
Nylon, Single Gang, 1.40" Dia. Hole, Black	P7BK
Cast Aluminum with Lift Cover, Indoor Use Only	23007

Note: See page 12 for locking switches.

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Building on more than 127 years of excellence, Bryant Electric offers wiring device solutions for industrial, commercial, institutional, and residential markets.

GET IN TOUCH:



brycs@hubbell.com



(800) 323-2792



www.hubbell.com/bryant



**Bryant Electric
40 Waterview Drive
Shelton, CT 06484**

